

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 January 2001 (11.01.2001)

PCT

(10) International Publication Number  
**WO 01/03456 A1**

(51) International Patent Classification<sup>7</sup>: **H04Q 7/32**

[DK/GB]; 54B Clifton Gardens, Little Venice, London W9 1AU (GB).

(21) International Application Number: **PCT/DK00/00364**

(22) International Filing Date: **4 July 2000 (04.07.2000)**

(74) Agent: **HOFMAN-BANG A/S; Hans Bekkevolds Allé 7, DK-2900 Hellerup (DK).**

(25) Filing Language: **English**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(26) Publication Language: **English**

(30) Priority Data:  
PA 1999 00972 5 July 1999 (05.07.1999) DK  
PA 1999 01426 5 October 1999 (05.10.1999) DK

(71) Applicant (*for all designated States except US*): **IFX SCANDINAVIA APS [DK/DK]; Bredgade 20, DK-1260 Copenhagen K (DK).**


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **KRØLL, Bo**

[Continued on next page]

(54) Title: **A METHOD OF TRANSMITTING DATA ITEMS TO A NUMBER OF MOBILE STATIONS, A MOBILE STATION, AND A STORAGE MODULE**

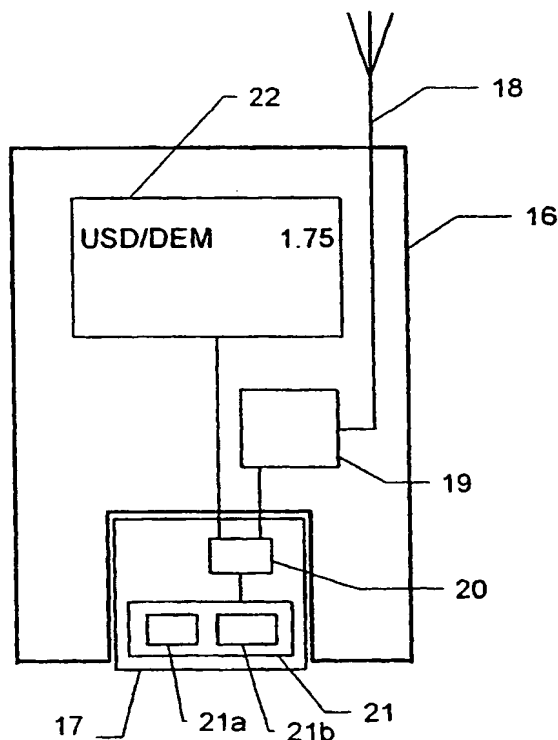

(57) Abstract: In a method of transmitting data items from a service provider through at least one base station to a large number of mobile stations, a mobile station comprises a storage module for storing data items, and a display for presenting data items to a user. The method comprises the steps of broadcasting said data items through the at least one base station, receiving said data items in the mobile station, and storing received data items in the storage module for subsequent presentation on the display. The method further comprises the steps of broadcasting said data items in a compressed format, and performing on said storage module a decompression of received data items. In this way an amount of data sufficient for Value Added Services can be transmitted without having to use the more expensive higher speed data channels, and the initial costs are kept at a low level.

WO 01/03456 A1

**BEST AVAILABLE COPY**



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

**Published:**

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

A method of transmitting data items to a number of mobile stations, a mobile station, and a storage module

5 The invention relates to a method of transmitting data items from a service provider through at least one base station to a large number of mobile stations, a mobile station comprising a storage module for storing data items, and a display for presenting data items to a user,  
10 the method comprising the steps of broadcasting said data items through the at least one base station, receiving said data items in the mobile station, and storing received data items in the storage module for subsequent presentation on the display. Further the invention  
15 relates to a mobile station for receiving such data items, and a storage module for use in such a mobile station.

Although mobile terminals, such as e.g. pagers and  
20 cellular telephones, are mostly used for two-way communication between a base station and each of a number of mobile terminals, it is also well known to transmit identical information to a large number of mobile terminals simultaneously. Examples of such information  
25 could be football results or other sports scores sent during an ongoing game, financial information such as stock exchange rates, weather reports, traffic information and airline schedules. The information is transmitted as text messages to the mobile terminal and  
30 displayed to the user of the terminal. Such services are often referred to as Value Added Services.

For years such services have been used in connection with pagers, but pagers have the disadvantage that, normally,  
35 a subscriber to a Value Added Service must buy a pager dedicated to this purpose only, which makes the initial

costs high. It is also known to use mobile telephones, such as GSM phones, for this purpose, in which case it is possible to use a terminal which is already used by the subscriber for normal two-way telephone communication.

5 This reduces the initial costs considerably.

One way of transmitting such services to mobile telephones is the so-called Short Message Service (SMS) which is a point-to-point service in which a message can be sent to or from one specific mobile terminal. However, in this service messages must be sent to each mobile terminal one after the other, and due to the high number of subscribers to these services SMS will normally be too slow to get the information to all recipients in a reasonable time.

10

15

Another way is the so-called Cell Broadcast Service in which messages are broadcast to every mobile station in a certain area such that all recipients get the information simultaneously. Although in some respects cell broadcast is ideal for the dissemination of most categories of value added services, it is rarely used because the bandwidth is too small in most cases to support medium density data transmission needed for such services, such as real-time financial information services.

20

25

Also some higher speed data channels, e.g. GSM data, WAP and various data channels of CDMA transmission systems are available, but these are much more expensive in use and thus less relevant in this situation.

30

Current generations of GSM and CDMA phones all incorporate a mutually compatible storage module in the form of a SIM card (Subscriber Identity Module). The original design purpose of the SIM card is to handle the user authentication process on behalf of the network

35

operator and the end-user to ensure correct billing and provide comprehensive safeguards against misuse for both parties. Therefore, SIM cards incorporate a number of functions to handle these tasks. Although some of these

5. SIM card functionalities may also be used for the provision of Value Added Services, this was never originally envisioned, and, therefore, these functionalities are not always well suited, or comprehensive enough, for this purpose.

10

It is an object of the invention to provide a method of transmitting data items to a large number of mobile stations in which an amount of data sufficient for Value Added Services can be transmitted without having to use

15 the more expensive higher speed data channels, and in which the initial costs are kept at a low level.

According to the invention, this is achieved in that the method further comprises the steps of broadcasting said

20 data items in a compressed format, and performing on the storage module a decompression of received data items.

Broadcasting the data items in a compressed format ensures that a sufficient amount of data can be

25 transmitted over low cost channels, such as cell broadcast, and using the storage module for performing the decompression keeps the initial investment low, because a new subscriber only has the marginal hardware cost of a new storage module which is used in his

30 existing mobile terminal.

When, as stated in claim 2, the received data items are stored in the storage module in the compressed format and decompressed subsequently, the demand for memory capacity

35 in the storage module is decreased so that more data items may be stored in a given size of memory.

Alternatively, as stated in claim 3, the decompression of received data items is performed before the data items are stored in the storage module. In this case it can be  
5 checked directly after reception of a data item whether this item is needed by the mobile station. By storing only those items needed by the mobile station considerable amounts of memory capacity in the storage module can be saved.

10

When, as stated in claim 4, the data items are broadcasted in strings of data items, each string further comprising information indicating that the string is in a compressed format, it is possible to transmit some data  
15 in the compressed format, while others are transmitted uncompressed, because the storage module is able to decide from this information whether a given data item needs to be decompressed or not. If, as stated in claim 5, each string further comprises information indicating a  
20 type of compressed format in which the string is broadcasted, it is further possible to use different types of compression in the system.

As mentioned, the invention further relates to a mobile  
25 station for receiving data items from a service provider through at least one base station, said mobile station comprising a display for presenting data items to a user, and a storage module and means for storing received data items in the storage module for subsequent presentation  
30 on the display. When the mobile station further comprises means for performing on the storage module a decompression of data items received in a compressed format, a mobile station suited for the above-mentioned method is provided.

35

A further improvement is achieved when, as stated in claim 7, the storage module is removable. This allows the module to be changed between mobile stations, and thus any mobile station compatible with the storage module can  
5 be used for receiving the data items. In an expedient embodiment, which is stated in claim 8, the mobile station is a GSM cellular telephone and the storage module is a SIM card (Subscriber Identity Module). As stated in claim 9, the GSM cellular telephone may support  
10 WAP, in which case WAP may be used for e.g. an initial negotiation dialog.

As stated in claim 10, the data items may be broadcasted in a Cell Broadcast service, as this service is well  
15 suited for getting the samme information to several mobile stations at the same time.

As mentioned, the invention further relates to a storage module for use in a mobile station adapted to receive  
20 data items from a service provider through at least one base station, said storage module comprising means for storing received data items. When the storage module further comprises means for performing a decompression of data items received in a compressed format, a storage  
25 module suited for the above-mentioned method is provided.

A further improvement is achieved when, as stated in claim 12, the storage module is removable. This allows the module to be changed between mobile stations, and  
30 thus any mobile station compatible with the storage module can be used for receiving the data items. In an expedient embodiment, which is stated in claim 13, the storage module is a SIM card (Subscriber Identity Module) for use in a GSM cellular telephone or a CDMA cellular  
35 telephone.

The invention will now be described more fully below with reference to the drawing, in which

figure 1 shows a network in which the invention may be  
5 used,

figure 2 shows a mobile terminal for use in the invention, and

10 figure 3 shows the mapping of memory according to the invention.

Figure 1 shows a network 1 in which the invention may be used. The network could be a cellular telephone system,  
15 which may e.g. be a GSM system, comprising two base stations 2 and 3. Further, the network may comprise a number of network elements (not shown) that may be base stations of the same type, or they may be other types of network elements well known in telecommunications  
20 networks. The base stations 2, 3 are provided with antennas 4, 5 by means of which they communicate with a number of mobile stations 6, 7, 8, 9, 10, 11, 12 and 13 such as cellular telephones.

25 Normally, a base station communicates on a two-way basis with each mobile station within its cell individually. This is the case e.g. when one of the cellular telephones is used for a telephone conversation with another telephone (mobile or not) somewhere else in the network.

30

Although the network is mainly used for individual communication with the mobile stations it may also be used in connection with a so-called Cell Broadcast service, which means that a base station broadcasts a  
35 common message which may be received by any mobile station within its cell simultaneously. This service is



mainly used for text messages which are intended to be presented on a display of the telephones. This service enables the network operator to send a common message to all mobile stations at the same time. Messages of this type may be from the network operator himself or they may be sent on behalf of an external service provider. Figure 1 shows such a service provider 14 connected to the network. Examples of information from a service provider could be football results or other sports scores sent during an ongoing game, stock exchange rates, weather reports, traffic information and airline schedules.

The network may also be used for the transmission of SMS (Short Message Service) messages. These are also text messages and they may be sent either to a mobile station or from a mobile station. A common text message intended for several mobile stations may also be sent as an SMS message, but then it must be sent to each mobile station individually, one after the other. However, if the information is sent to a large number of mobile stations it will take a long time before they have all received it.

In the described embodiment Cell Broadcast is used for the transmission of common messages from the service provider 14 to a number of the mobile stations 6-13, while SMS is used for two-way communication between the service provider and individual mobile stations during a service dialogue, which may typically take place when a new subscriber is connected to the service, or when a subscriber wants some changes to the subscription.

Figure 2 shows an example of a mobile terminal 16 which may be used according to the invention. The mobile terminal could be a normal GSM telephone and as can be seen, the telephone is connected to a removable SIM card

(Subscriber Identity Module), which will be described in further detail below. The telephone 16 further comprises a transmit/receive aerial 18, a transmit/receive circuit 19 and a display 22 on which text messages may be  
5 displayed for the user.

The SIM card 17 connected to the telephone 16 comprises a processor or control circuit 20 and a memory 21. The memory 21 is divided into two sections, i.e. a mask-  
10 programmed ROM 21a containing the SIM operating system and other program code that will be described in further detail, and a RAM and/or EEPROM 21b for storage of data items and for use by the processor circuit 20 during operation.

15

When data items in the form of text messages are received from a service provider of a value added service, they are received by the aerial 18 and routed through the circuit 19 to the SIM card 17 on which the processor  
20 circuit 20 stores the data item in the memory 21b. Subsequently, the data items stored in the memory may be displayed on the display 22. Normally, a specific data item is requested by the user by means of a keypad (not shown), and the requested data item (provided it is  
25 actually stored in the memory 21b) is fetched from the memory by the processor circuit 20 and transferred to the display 22. In figure 2 an example of a financial information, i.e. an exchange rate, is shown.

30 According to the invention the data items distributed from the service provider 14 and transmitted as cell broadcast to the mobile stations are transmitted in a compressed format. The types of compression used are well known and described in the art and, thus, it will not be  
35 described in further detail here. For instance, in case of financial information certain specialized compression

algorithms take advantage of the highly ordered nature of the input information. In case of free text information, different types of compression algorithms, e.g. of the Huffman or LZW class, are more efficient and suitable.

5

In the receiver end a corresponding decompression application is embedded and applied on the SIM card 17. The decompression algorithm is embedded as instructions in the ROM memory 21a, such that the processor circuit 20  
10 is able to perform the decompression function. Several different decompression algorithms corresponding to the above-mentioned may be embedded, thus allowing for the free use of these by the service provider. The advantage of this approach is the ability to separately apply two  
15 or more different kinds of data compression/decompression adapted to and optimized for different types of data. Embedding the decompression application on the SIM card 17 means that a user wanting the value added service of a service provider must buy a special SIM card with the  
20 corresponding decompression application embedded, but this cost is much less than the cost of a specialized terminal needed in prior art solutions.

After decompression, the expanded value added service  
25 data are routed to the display of the receiver and/or to the appropriate memory locations on the SIM card. As a result of transmitting the data in a compressed format and decompressing on the SIM card is a significant reduction in transmission volume and the costs to the  
30 mobile phone network operator(s) and/or to the end-users of value added services.

The SIM card will typically have access to read and receive several incoming data channel subsets of the  
35 general operating standard to which it belongs. E.g. a GSM receiver incorporates separately dedicated data

channels (Cell Broadcast, SMS and GSM data), which may all be routed through and read by the SIM card. In the prior art, all SMS services are thus routed through the SIM card to the appropriate SIM card memory locations and to the display of the receiver without the ability to apply any data decompression. When the general data decompression module is embedded and used on the SIM card, this may be applied to any incoming value added services on any data channel, provided only that this data channel, e.g. SMS, is accessible for post reception processing in the SIM card by the general data decompression module, which is also embedded in the SIM card.

Normally, the data items are sent in data strings, and the compressed data strings may be prefixed with unique flag(s) or a Message Identifier Data (MID) unequivocally identifying the data string or message type and the specifically appropriate decompression algorithm to be used upon reception and routing to the SIM card application. E.g. in the case of Cell Broadcast on GSM phones this is accomplished by the uniquely identifiable Cell Broadcast Message Identifier (CBMID) as defined in the GSM standard, which prefixes the compressed data string. A standard data input interface as well as data output interface to the appropriate memory locations allows the interchangeable application of different types of decompression if necessary. Having read the unequivocal data string or message flag or header, the data decompression module embedded in the SIM card subsequently decompresses the incoming data stream as invoked by this particular flag or message identifier (MID).

The received data items may also, as an alternative, be stored on the SIM card in the compressed form in order to

save memory capacity. They are then decompressed when they are fetched from the memory for display on the display of the terminal. Another and very efficient way of saving memory capacity on the SIM card is described  
5 below. this is needed because many value added services require memory capacity much in excess of what is available on the SIM card.

10 In the current art of SIM card Memory Management the SIM cards include a general Menu Function found in the SIM card Tool Kit Application, (STA). This menu function shows the user which functionalities and value added services are available, e.g. routed to and stored in the SIM card, in the case of a value added service. While the  
15 SIM card menu function is thus to some extent "aware" of the underlying SIM card memory organisation, it does not partake in any actual underlying memory management apart from simple storing and retrieving tasks within the given physical memory of the SIM card. As the memory of the SIM  
20 card is quite limited this presents a serious limitation to the number and "depth" of value added services, which can be maintained by the SIM card memory without memory overflow.

25 According to the invention, a dynamic application is embedded in a SIM card, which is aware of and able to configure a part of the SIM card memory reserved for value added services support. The application treats the actually available (physical as opposed to virtual) SIM  
30 memory as a "cache like" application. Mostly, or often, data requests from the user will be repetitive. In the case of financial information the user is likely to request the same stock price(s) several consecutive times before altering his request. The strategy of the cache  
35 like memory application seeks to benefit statistically from this behaviour by directly making available in the

physical SIM card memory the data requested. Logically, this is achieved by linking or "mapping" the logical address of the large, or unlimited, virtual memory with a corresponding address in the physical SIM card memory.

5 The large virtual memory corresponds to a physical memory which is present at the service provider.

This process of mapping is illustrated in figure 3. The large virtual memory is shown as the memory 24 at the service provider. For the purpose of illustration this memory is here shown as having 30 memory locations, of which the rows are labelled A, B, C, D and E, and the columns labelled I, II, III, IV, V and VI. Each memory location corresponds to a data item and is labelled by its row and column, e.g. (A II). In the reality there are many more locations, typically several thousands. The physical memory 21b of a mobile terminal can accommodate only a fraction of these data items. In the example, the memory locations (B V), (E V), (A II) and (E I) of the large virtual memory are stored in the memory 21b. The reason for selecting these four items may be that the user subscribes to only these four items, or they may be the four most recently used by the user. In the memory 21b of other mobile terminals, different memory locations will typically be stored.

When the user of a terminal requests one of those items stored in the memory 21b of his terminal, the item will be fetched from the memory and displayed on the display immediately. Sometimes, data will be requested by the user corresponding to data addresses "outside" the current contents of the physical memory 21b. This elicits an automatic data request and "fill-up" dialogue with the service provider, which is invisible to the user. The freshly filled up data location is then mapped and copied to the physical memory. If the memory is already full,

then another item will be remapped to the virtual memory and deleted from the physical memory (First In First Out Principle) to make room for the mapping to physical memory of the new request.

5

Alternatively, all the data items of the large virtual memory 24 are transmitted cyclically, such that each data item in the individual mobile terminals are all updated at the same rate in sampled real-time, typically every  
10 minute. This means that the four items (B V), (E V), (A II) and (E I) stored in the memory 21b will be updated at this rate. When a data item corresponding to data addresses outside the current contents of the physical memory is requested, the new data item is read next time  
15 it is updated, and subsequently stored in the physical memory and displayed for the user.

The invention allows the service provider and/or the network operator to accurately allocate to each value  
20 added service a specific memory array (set of co-ordinates) location, e.g. "Sports in memory array L1 - O25, Financial Information, type "Stock Market" in memory array A1 - K 80" and so on. This is advantageous in particular for the network operator(s) who wish(es) to  
25 efficiently pack as large an offering of value added services to the networks users/subscribers as possible. In all cases each value added service is represented and selectable via the menu in the display. This menu is established and maintained using the standard SIM Toolkit  
30 Application or STA.

Although a preferred embodiment of the present invention has been described and shown, the invention is not restricted to it, but may also be embodied in other ways  
35 within the scope of the subject-matter defined in the following claims. As an example, all such mobile phone

receivers, which incorporate a Subscriber Identity Module, or so-called SIM card, e.g. mobile phones encompassed by the most common industry standards such as GSM, WAP, GPRS, UMTS and/or CDMA, may be used in  
5 connection with the invention.



P a t e n t   C l a i m s :  
-----

1. A method of transmitting data items from a service  
5. provider through at least one base station to a large  
number of mobile stations, a mobile station comprising a  
storage module for storing data items, and a display for  
presenting data items to a user, the method comprising  
the steps of:
- 10 • broadcasting said data items through the at least one  
base station,  
• receiving said data items in the mobile station, and  
• storing received data items in the storage module for  
subsequent presentation on the display,
- 15 c h a r a c t e r i z e d   i n   t h a t   t h e   m e t h o d   f u r t h e r  
comprises the steps of:
- broadcasting said data items in a compressed format,  
and  
• performing on said storage module a decompression of  
20 received data items.
2. A method according to claim 1,  
c h a r a c t e r i z e d   i n   t h a t   t h e   r e c e i v e d   d a t a  
items are stored in the storage module in the compressed  
25 format and decompressed subsequently.
3. A method according to claim 1,  
c h a r a c t e r i z e d   i n   t h a t   s a i d   d e c o m p r e s s i o n   o f  
received data items is performed before the data items  
30 are stored in the storage module.
4. A method according to claims 1-3,  
c h a r a c t e r i z e d   i n   t h a t   s a i d   d a t a   i t e m s   a r e  
broadcasted in strings of data items, each string further  
35 comprising information indicating that the string is in a  
compressed format.

5. A method according to claim 4, characterized in that each string further comprises information indicating a type of compressed  
5 format in which the string is broadcasted.

6. A mobile station for receiving data items from a service provider through at least one base station, said mobile station comprising  
10 • a display for presenting data items to a user, and  
• a storage module and means for storing received data items in the storage module for subsequent presentation on the display,  
characterized in that the mobile station  
15 further comprises means for performing on said storage module a decompression of data items received in a compressed format.

7. A mobile station according to claim 6,  
20 characterized in that said storage module is removable.

8. A mobile station according to claim 7, characterized in that it is a GSM cellular  
25 telephone and that the storage module is a SIM card (Subscriber Identity Module).

9. A mobile station according to claim 8, characterized in that the GSM cellular  
30 telephone supports WAP.

10. A mobile station according to claims 6-9, characterized in that the data items are broadcasted in a Cell Broadcast service.

35

11. A storage module for use in a mobile station adapted to receive data items from a service provider through at least one base station, said storage module comprising means for storing received data items,

5 c h a r a c t e r i z e d in that the storage module further comprises means for performing a decompression of data items received in a compressed format.

12. A storage module according to claim 11,  
10 c h a r a c t e r i z e d in that it is removable.

13. A storage module according to claim 12,  
c h a r a c t e r i z e d in that it is a SIM card  
(Subscriber Identity Module) for use in a GSM cellular  
15 telephone or a CDMA cellular telephone.

1/3

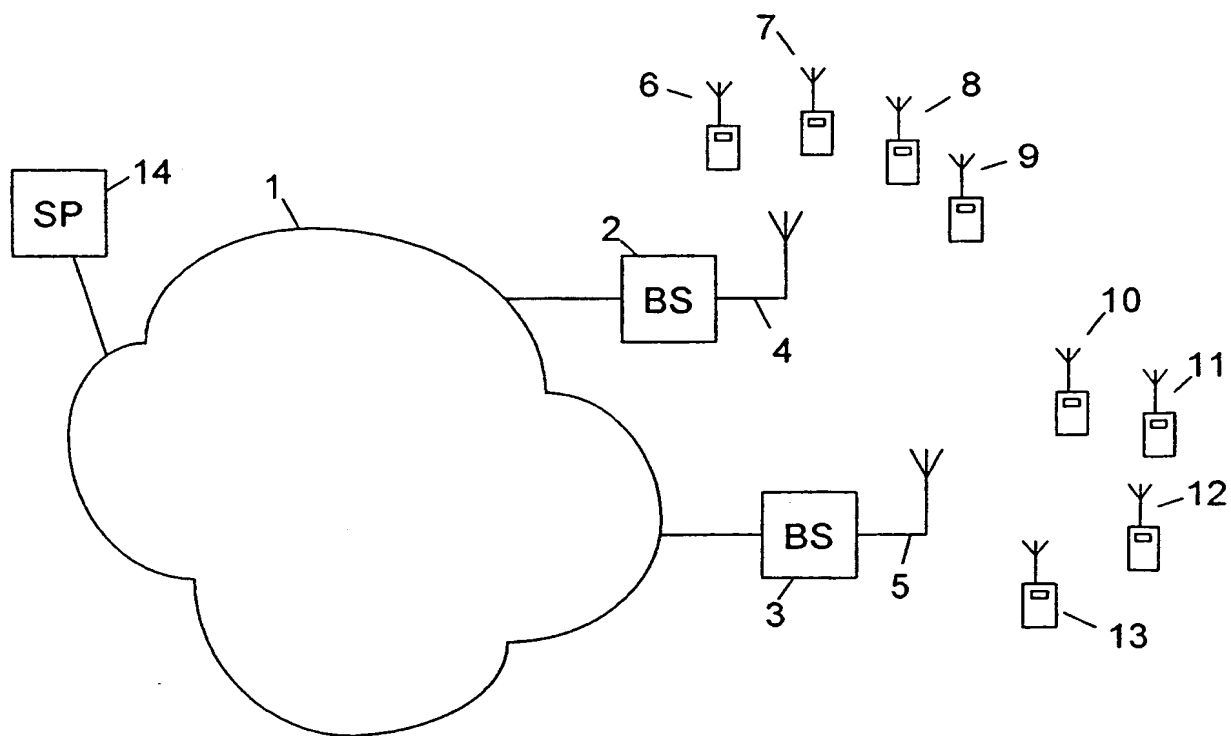


Fig. 1

2/3

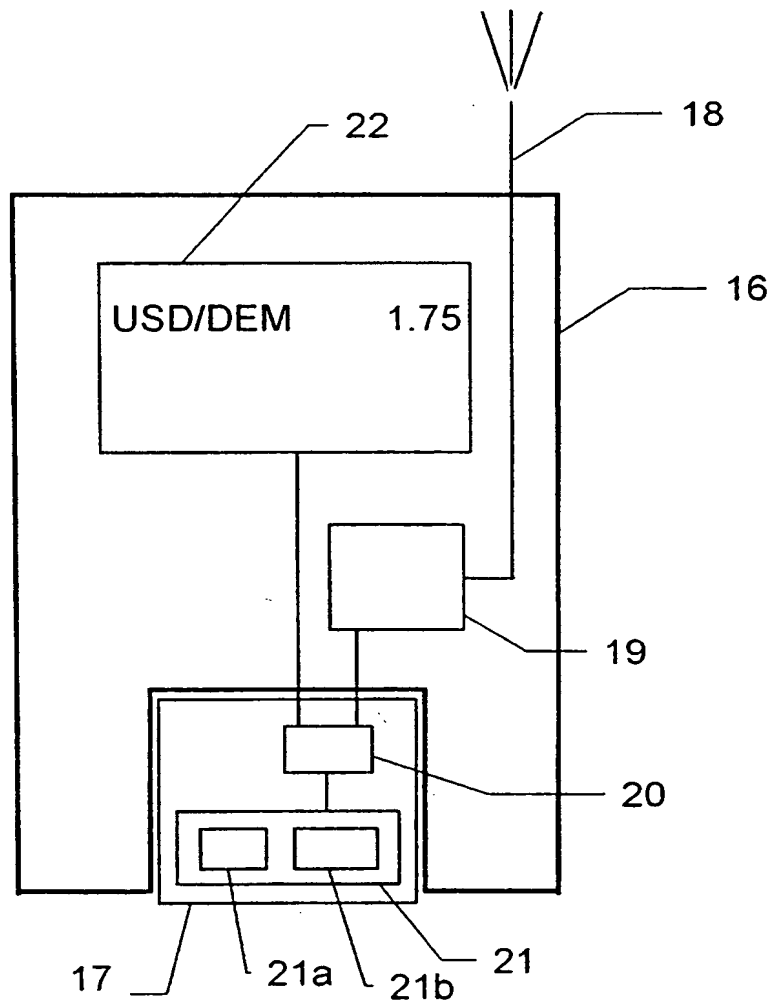


Fig. 2

3/3

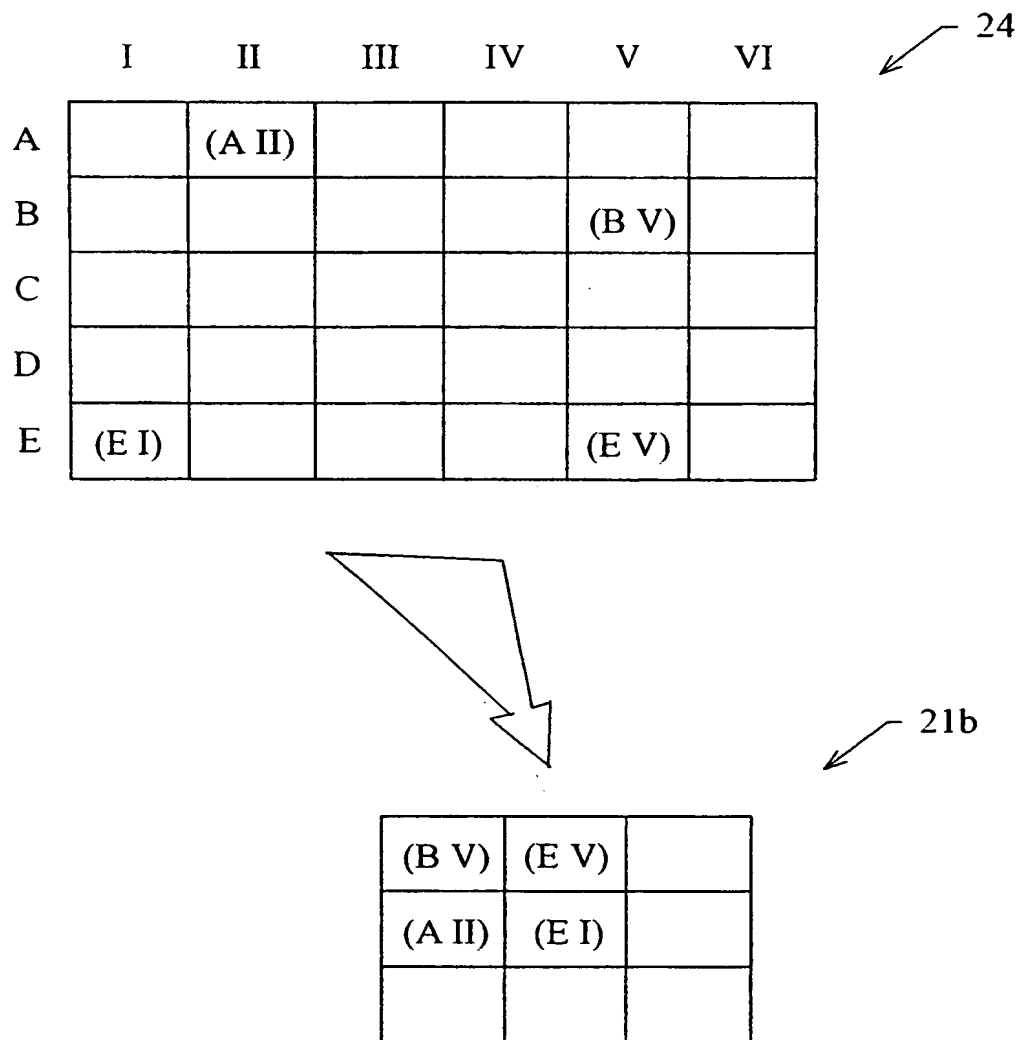


Fig. 3

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 00/00364

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/32

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	GB 2317246 A (ORANGE PERSONAL COMMUNICATIONS SERVICES LIMITED), 18 March 1998 (18.03.98), page 1, line 1 - page 7, line 3, claims 16,17-20, abstract --	1-13
Y	EP 0562890 A1 (HUTCHINSON MICROTEL LIMITED), 29 Sept 1993 (29.09.93), page 1, column 1, line 1 - column 2, line 22, claims 1-6, abstract --	1-13
A	WO 9838820 A2 (TELEFONAKTIEBOLAGET LM ERICSSON), 13 Sept 1998 (13.09.98), page 2, line 1 - line 12, abstract --	1-13



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier application or patent but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

30 October 2000

Date of mailing of the international search report

01 12 2000

Name and mailing address of the ISA/  
European Patent Office

Authorized officer

Thomas Tholin/mj

Facsimile No.

Telephone No.

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/DK 00/00364

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0804046 A2 (NOKIA MOBILE PHONES LTD.), 29 October 1997 (29.10.97), page 1, column 1, line 1 - column 2, line 58, abstract  -- -----	1-13



# INTERNATIONAL SEARCH REPORT

Information on patent family members

03/10/00

International application No.

PCT/DK 00/00364

GB	2317246	A	18/03/98	AU	1608897	A	02/04/98
				CN	1230327	A	29/09/99
				EP	0925698	A	30/06/99
				GB	9619159	D	00/00/00
				WO	9811746	A	19/03/98
				ZA	9707715	A	01/03/99

EP	0562890	A1	29/09/93	AT	193965	T	15/06/00
				DE	69328847	D	00/00/00
				GB	9206679	D	00/00/00

WO	9838820	A2	13/09/98	AU	6640398	A	18/09/98
				BR	9807612	A	22/02/00
				CN	1249112	T	29/03/00
				DE	19882136	T	05/01/00
				US	6023620	A	08/02/00

EP	0804046	A2	29/10/97	US	5887254	A	23/03/99
----	---------	----	----------	----	---------	---	----------

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**